



# IG-130-94R


Recessed unique luminaire, providing high performance in a low glare. With adjustable head for aiming. Can be installed in floor or wall. Suitable for interior and exterior use. Can choose from a variety of lenses.

## SPECIFICATIONS

<b>Power</b>	3 x3watt
<b>Current</b>	700mA Constant current
<b>Electric Connection</b>	Series / Parallel Connection
<b>Driver (not included)</b>	Led Driver 700mA
<b>Material</b>	Aluminum 6061 CNC processed Tempered Crystal Glass
<b>Surface Coating</b>	Neutral Anodize Coating
<b>Cable</b>	Neoprene Cable (100cm)
<b>IP Rating</b>	IP67
<b>Weight</b>	1200g
<b>Accessories</b>	Housing box P/N: B-94 HONEYCOMB



kg  
500

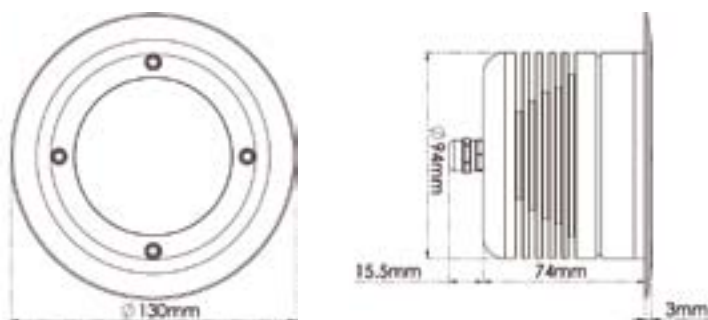

Code	Model	Led Colour	Optics	Glass	Body color	Supply
LU	131	1  Warm White	1  5°	C Clear	N Natural	V Constant Voltage
		2  Natural White	2  15°		P Optional color paint	C Constant Current
		3  Cold White	3  25°		Specify RAL	
		4  Amber	4  45°		Details on page 92	
		5  Red				
		6  Green				
		7  Blue				
		8  RGB				