


LedDesign

Led Lighting Solutions LTD

info@led-design.co.il
www.led-design.co.il

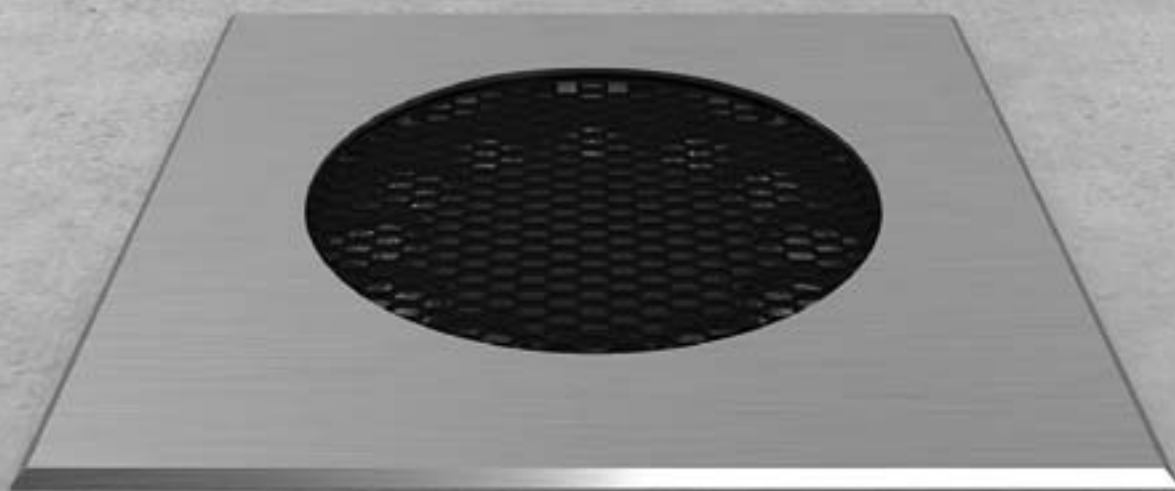

IG-170-136Q-24W

Recessed luminaire, providing high performance in a low glare. Can be installed in floor or wall. Suitable for interior and exterior use. Can choose from a variety of lenses.




SPECIFICATIONS

Power	12 x 1watt / 12 x 2watt
Current	350 / 500mA Constant current
Electric Connection	Series / Parallel Connection
Driver (not included)	Led Driver 350 / 500mA
Material	Aluminum 6061 CNC processed Tempered Crystal Glass
Surface Coating	Neutral Anodize Coating
Cable	Neoprene Cable (100cm)
IP Rating	IP67
Weight	1200g
Accessories	Housing box P/N: B-136 HONEYCOMB



kg
500

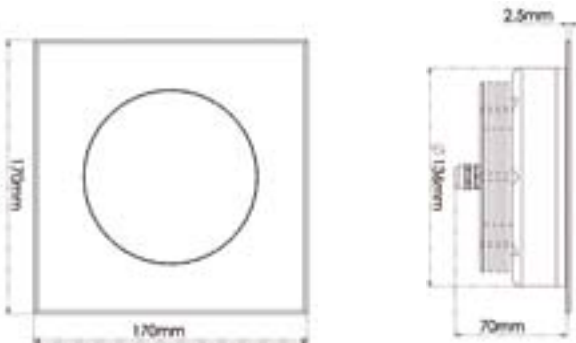

Code	Model	Led Colour	Optics	Glass	Body color	Supply
LU	130	1 Warm White	1 5°	C Clear	N Natural	V Constant Voltage
		2 Natural White	2 15°		P Optional color paint	C Constant Current
		3 Cold White	3 25°		Specify RAL	
		4 Amber	4 45°		Details on page 92	
		5 Red				
		6 Green				
		7 Blue				
		8 RGB				