

LedDesign

Led Lighting Solutions LTD

info@led-design.co.il
www.led-design.co.il



PL-160-32R


Submersible luminaire for fountains, providing high performance in a low glare. Designed for permanent immersion or above water level. Can choose from a variety of lenses.

SPECIFICATIONS

Power	6 x 3watt
Current	700mA Constant current
Electric Connection	Series / Parallel Connection
Driver (not included)	Led Driver 700mA
Material	Aluminum 6061 CNC processed PMMA
Surface Coating	Hard Neutral Anodize Coating
Cable	Neoprene Cable (300cm)
IP Rating	IP68
Weight	650g
Accessories	R-8020

For underwater installations, water PH should be between 6.5 to 7.5, lower or higher PH will damage the fixture.

IP68

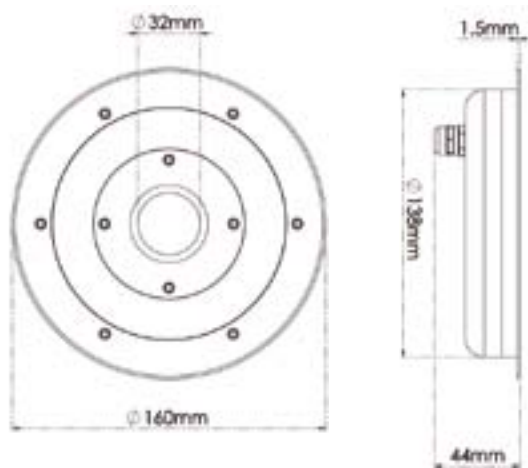

Code	Model	Led Colour	Optics	Glass	Body color	Supply
LU	213	1 Warm White	1 5°	C Clear	B Black	V Constant Voltage
		2 Natural White	2 15°		P Optional color paint	C Constant Current
		3 Cold White	3 25°		Specify RAL	
		4 Amber	4 45°		Details on page 92	
		5 Red				
		6 Green				
		7 Blue				
		8 RGB				