


# LedDesign

Led Lighting Solutions LTD

[info@led-design.co.il](mailto:info@led-design.co.il)  
[www.led-design.co.il](http://www.led-design.co.il)



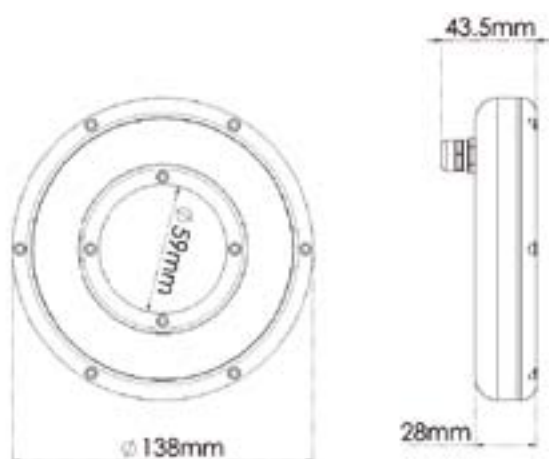

## PL-138-59R

Submersible luminaire for fountains, providing high performance in a low glare. Designed for permanent immersion or above water level. Can choose from a variety of lenses.

### SPECIFICATIONS

<b>Power</b>	6 x 3watt
<b>Current</b>	700mA Constant current
<b>Electric Connection</b>	Series / Parallel Connection
<b>Driver (not included)</b>	Led Driver 700mA
<b>Material</b>	Aluminum 6061 CNC processed PMMA
<b>Surface Coating</b>	Hard Neutral Anodize Coating
<b>Cable</b>	Neoprene Cable (300cm)
<b>IP Rating</b>	IP68
<b>Weight</b>	580g
<b>Accessories</b>	R-8020

For underwater installations, water PH should be between 6.5 to 7.5, lower or higher PH will damage the fixture.

IP68



Code	Model	Led Colour	Optics	Glass	Body color	Supply
LU	212	1  Warm White	1  5°	C Clear	B Black	V Constant Voltage
		2  Natural White	2  15°		P Optional color paint	C Constant Current
		3  Cold White	3  25°		Specify RAL	
		4  Amber	4  45°		Details on page 92	
		5  Red				
		6  Green				
		7  Blue				
		8  RGB				